

**1310nm Uncooled High-Power DFB TOSA**

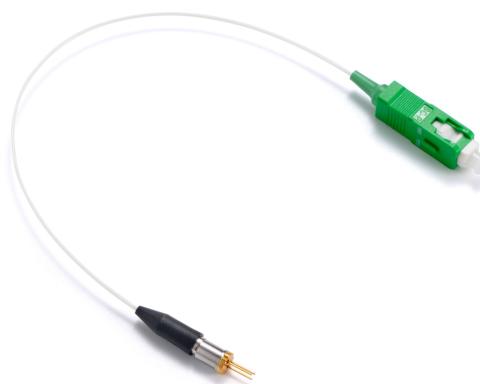
SHIJIA's 1310nm Uncooled High-Power DFB TOSA style packages are a cost-effective means of providing a low-noise light source.

**Features:**

- Uncooled operation
- 1310nm High-Power DFB laser
- High stability and reliability
- Different connectors :SC/APC,LC/APC,FC/APC
- Operating case temperature: 0to 70°C
- Qualified meet ROHS requirement

**Applications:**

- Optical fiber sensor
- Other optical transmission system

**Optical and Electrical Characteristics( $T_c=25^{\circ}\text{C}\pm2^{\circ}\text{C}$ , Unless otherwise noted):**

Parameter	Symbol	Min	Typ	Max	Units	Notes
Threshold Current	$I_{\text{th}}$		23	55	mA	CW, $T_c=25^{\circ}\text{C}$
Output Current	$I$		150	250	mA	$T_c=25^{\circ}\text{C}$ , $P_f=20\text{mW}$
Centre Wavelength	$\lambda$	1300	1310	1320	nm	CW, $I=200\text{mA}$
Optical Spectrum Width	$\Delta\lambda$			1	nm	CW $I=200\text{mA}$ , at -20dB
Side Mode Suppression Ratio	SMSR	30			dB	CW, If = 200mA
Monitor Current	$I_m$	50		4000	uA	$I_t=200\text{mA}$
Monitor Dark Current	$I_d$			100	nA	$V=-5\text{V}$
Focal Length	$FL$	7.3	7.8	8.3	mm	

**\*Remark: Power can be optimized per customer's requirement**